


Male - Male Bobbins

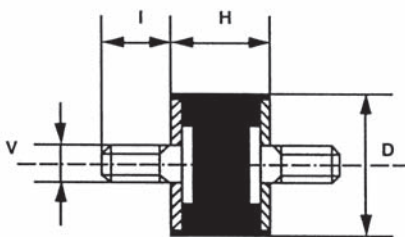

Bobbin Mounts are a low cost solution to reducing vibration & shock. They can be used in either Compression or Shear or a combination, and are available with various thread configurations. Additional Sizes are available, Plus Stainless Steel metals and Oil Resistant / High Temperature rubbers available on request.

Applications include - General Purpose mountings, popular in a wide range of applications & industries including Diesel Engines, Generator Sets, Instruments, Industrial Machinery & Equipment. Weight range from 1kg to 2000Kg per mounting.

PART	D x H	V x I	45 IRHD	60 IRHD	70 IRHD	mm
0808MM06	08 x 08	M3 x 06	1.8	3.3	4.5	0.6
1008MM10	10 x 08	M4 x 10	2.3	4.3	6	0.6
1010MM10	10 x 10	M4 x 10	2	3.4	5.5	0.8
1111MM10	11 x 11	M4 x 10	2.1	4.5	6	0.5
1508MM10	15 x 08	M4 x 10	7.7	14.1	19.5	0.6
1515MM13	15 x 15	M4 x 13	5.8	10.7	15	1.3
1515MM15	15 x 15	M5 x 15	5.8	10.7	15	1.3
1515MM12	15 x 15	M6 x 12	5.8	10.7	15	1.3
1525MM10	15 x 25	M4 x 10	2.3	5.8	7.1	2
2008MM18	20 x 08	M6 x 18	16.6	31	42	0.8
2015MM18	20 x 15	M6 x 18	9	17	23	1.2
2020MM18	20 x 20	M6 x 18	7	13	18	1.6
2025MM18	20 x 25	M6 x 18	6.7	12	17	2.2
2030MM18	20 x 30	M6 x 18	5.3	9.6	13.5	2.6
2510MM18	25 x 10	M6 x 18	25	48	66	0.7
2515MM18	25 x 15	M6 x 18	18	34	48	1.2
2520MM18	25 x 20	M6 x 18	16	29	39	1.6
2520MM20	25 x 20	M8 x 20	16	29	39	1.6
2522MM20	25 x 22	M8 x 20	14.4	27	36	1.8
2525MM18	25 x 25	M6 x 18	12.4	23	32	2.1
2530MM18	25 x 30	M6 x 18	11.5	22	29	2.7
2530MM20	25 x 30	M8 x 20	11.5	22	29	2.7
3015MM20	30 x 15	M8 x 20	22	41	57	1.1
3020MM15	30 x 20	M8 x 15	20	38	51	1.6
3020MM20	30 x 20	M8 x 20	20	38	51	1.6
3022MM20	30 x 22	M8 x 20	19	34	47	1.8
3025MM20	30 x 25	M8 x 20	17	29	40	2.1
3030MM20	30 x 30	M8 x 20	15	28	38	2.6
3040MM20	30 x 40	M8 x 20	14	27	36	3.6
4020MM23	40 x 20	M8 x 23	41	77	106	1.6
4020MM25	40 x 20	M10 x 25	41	77	106	1.6
4025MM25	40 x 25	M10 x 25	38	71	97	2.1
4028MM25	40 x 28	M10 x 25	35	65	89	2.4
4030MM23	40 x 30	M8 x 23	33	62	87	2.6
4030MM25	40 x 30	M10 x 25	33	62	87	2.6
4035MM23	40 x 35	M8 x 23	30	56	78	3.1
4035MM25	40 x 35	M10 x 25	30	56	78	3.1
4040MM23	40 x 40	M8 x 23	29	54	74	3.6
4040MM25	40 x 40	M10 x 25	29	54	74	3.6
4045MM25	40 x 45	M10 x 25	28	52	73	4.1
5020MM28	50 x 20	M10 x 28	85	159	219	1.5
5025MM25	50 x 25	M10 x 25	79	147	203	2

PART	D x H	V x I	45 IRHD	60 IRHD	70 IRHD	mm
5030MM23	50 x 30	M8 x 23	68	125	173	2.5
5030MM28	50 x 30	M10 x 28	68	125	173	2.5
5035MM25	50 x 35	M10 x 25	59	110	151	3
5040MM25	50 x 40	M10 x 25	49	91	126	3.5
5040MM28	50 x 40	M10 x 28	49	91	126	3.5
5045MM25	50 x 45	M10 x 25	44	82	114	4
5050MM25	50 x 50	M10 x 25	40	76	104	4.5
6025MM25	60 x 25	M10 x 25	122	227	314	2
6030MM25	60 x 30	M10 x 25	108	200	276	2.5
6035MM25	60 x 35	M10 x 25	106	197	272	3.1
6035MM37	60 x 35	M12 x 37	106	197	272	3.1
6040MM25	60 x 40	M10 x 25	98	183	249	3.5
6040MM37	60 x 40	M12 x 37	98	183	249	3.5
6045MM25	60 x 45	M10 x 25	89	166	230	4
6045MM37	60 x 45	M12 x 37	89	166	230	4
6050MM37	60 x 50	M12 x 37	80	149	205	4.5
6535MM25	65 x 35	M10 x 25	129	240	332	3
7030MM25	70 x 30	M10 x 25	170	317	432	2.4
7030MM37	70 x 30	M12 x 37	170	317	432	2.4
7035MM25	70 x 35	M10 x 25	150	298	411	2.9
7035MM37	70 x 35	M12 x 37	150	298	411	2.9
7040MM25	70 x 40	M10 x 25	139	258	357	3.4
7040MM37	70 x 40	M12 x 37	139	258	357	3.4
7045MM25	70 x 45	M10 x 25	125	232	312	3.9
7045MM37	70 x 45	M12 x 37	125	232	312	3.9
7050MM25	70 x 50	M10 x 25	114	211	292	4.4
7050MM37	70 x 50	M12 x 37	114	211	292	4.4
7525MM37	75 x 25	M12 x 37	221	420	577	1.9
7535MM37	75 x 35	M12 x 37	170	340	470	2.9
7540MM37	75 x 40	M12 x 37	150	280	386	3.4
7550MM37	75 x 50	M12 x 37	143	268	370	4.4
7555MM37	75 x 55	M12 x 37	125	235	324	4.9
8030MM35	80 x 30	M14 x 35	270	512	704	2.4
10030MM44	100 x 30	M16 x 44	460	880	1210	2.2
10040MM44	100 x 40	M16 x 44	370	670	925	3.2
10050MM44	100 x 50	M16 x 44	290	525	725	4.2
10055MM44	100 x 55	M16 x 44	270	500	690	4.7
10060MM44	100 x 60	M16 x 44	260	470	650	5.2
10075MM44	100 x 75	M16 x 44	215	380	525	6.7
100100MM44	100 x 100	M16 x 44	165	295	410	9.2
15075MM44	150 x 75	M16 x 44	650	1196	1651	6.7

DATA SHEET MM 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.